


如何傳送動作快照給FNS-1000 FTP伺服器


適用 FCS-1010, FCS-1030, FCS-1040, WCS-2010, WCS-2030)

輸入FTP伺服器的PORT→IP 192.168.123.128，用戶名字admin密碼不用
在FTP伺服器裡的檔案夾是tt

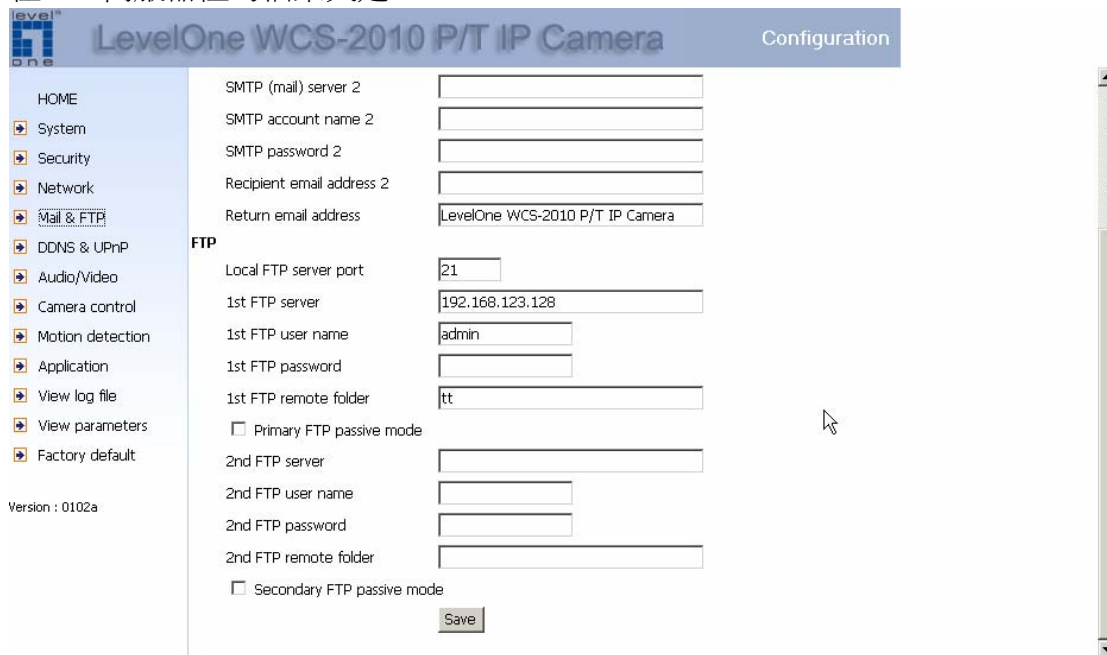

The screenshot shows the 'Configuration' page for a LevelOne WCS-2010 P/T IP Camera. The left sidebar contains a navigation menu with options: HOME, System, Security, Network, Mail & FTP, DDNS & UPnP, Audio/Video, Camera control, Motion detection, Application, View log file, View parameters, and Factory default. The 'Mail & FTP' section is expanded, showing the 'FTP' configuration area. The 'FTP' section includes fields for 'Local FTP server port' (set to 21), '1st FTP server' (192.168.123.128), '1st FTP user name' (admin), '1st FTP password' (empty), and '1st FTP remote folder' (tt). There are also checkboxes for 'Primary FTP passive mode' and 'Secondary FTP passive mode', both of which are unchecked. A 'Save' button is located at the bottom of the FTP configuration area.

首先啓用Motion detection爲先。給新的名字和視窗，調整感光度和百分百分率。
在照像機的前面揮動你的手，你看見綠色變紅色，它表示動作已經啓動。

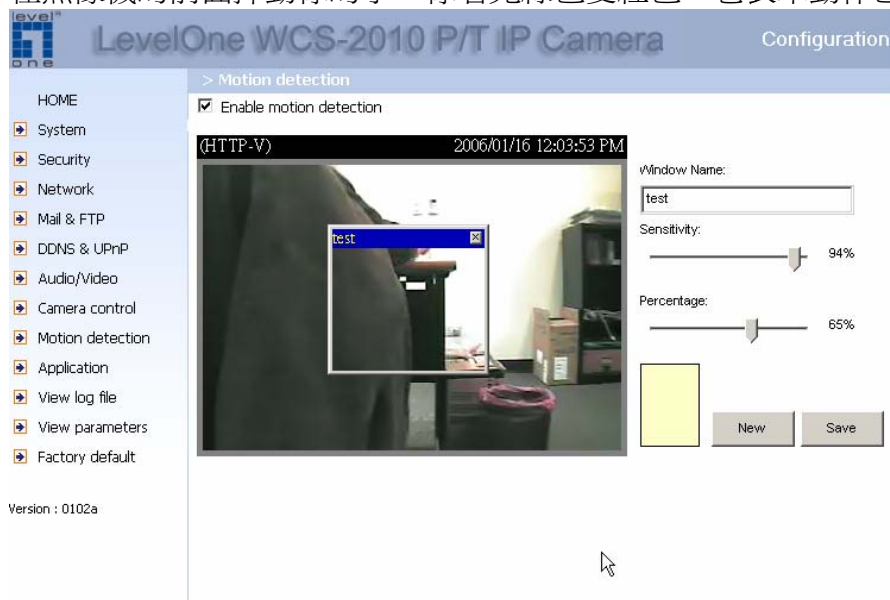

The screenshot shows the 'Configuration' page for a LevelOne WCS-2010 P/T IP Camera, specifically the 'Motion detection' section. The 'Enable motion detection' checkbox is checked. Below this, there is a live video feed window titled '(HTTP-V)' with a timestamp of '2006/01/16 12:03:53 PM'. The video feed shows a person's hand moving in front of the camera. To the right of the video feed, there are settings for 'Window Name' (set to 'test'), 'Sensitivity' (set to 94%), and 'Percentage' (set to 65%). There are also 'New' and 'Save' buttons at the bottom right of the motion detection settings.

應用：每週時間表，選取您要做動作快照的天數與時間。
SNAPSHOT INTERVAL：每間隔幾秒
打勾 send snapshots by FTP這樣照片才會傳送到您FTP裡

The screenshot shows the configuration interface for a Level One FCS-1040 P/T/Z IP Network Camera. The page is titled 'Configuration' and features a sidebar with navigation options: Home, System, Security, Network, DDNS & UPnP, Mail & FTP, Video, Audio, Motion detection, Camera control, Application, View log file, View parameters, and Factory default. The main content area is titled 'Weekly schedule' and includes the following settings:

- Weekly schedule:** All days (Sun, Mon, Tue, Wed, Thu, Fri, Sat) are selected. Snapshots begin at 09:00:00 and stop at 22:00:00. The option 'All the time except for the above schedule' is unchecked.
- Snapshot file name prefix:** video
- Event operation:** Checked.
- General:** Delay is set to 3 seconds before detecting the next event. Send 1 pre-event image(s) when event occurs.
- Trigger condition:** Input is high, Input is low, Input is rising, and Input is falling are all checked. Detect motion in: (empty field).
- Trigger action:** Note: Motion detection must be setup first. All four options are checked: Trigger output alarm while input condition matched, Trigger output alarm while motion detected, Upload snapshots while input condition matched, and Upload snapshots while motion detected.
- Reset output:** Unchecked.
- Sequential operation:** Unchecked. Snapshot interval: 1 second(s).
- Send snapshots by email:** Unselected.
- Send snapshots by FTP:** Selected. FTP put snapshots with date and time suffix is checked.

A 'Save' button is located at the bottom of the configuration area.

FNS-1000 構造

1. 啓動FTP 伺服器,如您打勾allow anonymous FTP login可以匿名登入

The screenshot shows the configuration page for the FNS-1000. The settings are organized into sections:

- Location:** Printer Name: SCFD894A_p1; Language Support: Chinese - Traditional (950); Time Zone: (GMT+08:00) Taipei; Local Date: Jan 16, 2006; Local Time: 11:46 am.
- NTP:** Enable NTP (Network Time Protocol); NTP Server: [empty]; NTP status: [empty]; Synchronize with NTP server every 24 Hours starting at 12:00 am. A "Sync Now" button is visible.
- WINS Server:** Enable WINS; WINS Server: [empty].
- Options:** Enable Guest Logins; Convert failed logins to "guest" logins (Windows networks); Enable FTP Server; Allow anonymous FTP login ("guest" rights); Enable UPnP Support; Enable Printer Icon; Port number for HTTP (Web Browser) connections to this Server: 80.

Buttons at the bottom: Save, Cancel, Restore Default Config, Help.

2. 在我們的例子裡我們使用admin帳號

The screenshot shows the user management interface for the FNS-1000. The page header includes the LevelOne logo and "FNS-1000 Soho NAS". Navigation links: Home, Users, Status, LAN, System, Advanced.

Existing Users: A list box contains "guest", "admin", and "test". Below the list are "Groups" and "Delete" buttons.

Properties: Name: guest; Comment: [empty]; Password: [masked]; Verify Password: [masked]; Create Private Folder (Share); Enable Disk Quota of [empty] MB. Buttons: Save as New User, Clear Form.

Buttons at the bottom: Save, Help.

3. 建立檔案夾tt

The screenshot shows the 'Shares' management interface for the FNS-1000 Soho NAS. The page title is 'FNS-1000 Soho NAS' with the LevelOne logo and tagline 'ONE WORLD, ONE BRAND, ONE LEVEL'. The navigation bar includes 'Home', 'Groups', 'Shares', 'Backup', 'Disk', 'Upgrade', and 'Setup'. The main content area is titled 'Existing Shares' and contains a table with the following entries:

| Name | Location |
|-------------------------|----------|
| ADMIN | |
| DISK | |
| tt | |
| ----- End of List ----- | |

Below the table are three buttons: 'Access', 'Browse', and 'Delete'. A note states: 'Deleting a Share does NOT delete the folder or files.' Below this is the 'Properties' section for the selected share 'ADMIN':

Name: ADMIN
Comment:
Location: Default folder Specify
Location can NOT be changed once share is created.

4. 設定IP : FTP伺服器IP位址。

The screenshot shows the 'LAN' configuration page for the FNS-1000 Soho NAS. The page title is 'FNS-1000 Soho NAS' with the LevelOne logo and tagline 'ONE WORLD, ONE BRAND, ONE LEVEL'. The navigation bar includes 'Home', 'Users', 'Status', 'LAN', 'System', and 'Advanced'. The main content area is titled 'IP Address' and contains the following settings:

These settings must match other devices and PCs on your LAN. Using the DHCP server function is recommended.

Obtain IP Address automatically (DHCP client)
 Fixed IP Address (recommended)

IP Address: . . .
Network Mask: . . .
Gateway: . . .

DHCP Server
 Enable DHCP Server function
Start Address: . . .
Finish Address: . . .

DHNS Server
Primary: . . .
Backup 1: . . . (optional)
Backup 2: . . . (optional)

DNS is required for E-mail messages, desirable if using DHCP Server

Buttons: Save, Cancel, Help

5. 一旦動作快照發現條件被滿足，您能看見這些”動作快照”被自動存放到tt檔案夾下

